

# Fisher™ 2052 Diaphragm Rotary Actuator



## General Application

Fisher 2052 spring-and-diaphragm rotary actuators are used on rotary-shaft valve bodies for throttling or on-off applications. The 2052 may be used for throttling service with a positioner or it may be used for on-off service without a positioner. The 2052 has an ISO 5211 mating interface that allows installation to non-Fisher valves. Refer to separate bulletins for valve and positioner information.

## Features

- **Compact Design, Smaller Actuators** — Ensures reduced valve/actuator envelope dimensions leading to greater mounting versatility for both skids and process plants, where space is at a premium.
- **Compatible with FIELDVUE DVC2000, DVC6200 and DVC6000 Digital Valve Controllers; and 3610J and 3620J Positioners** — The new actuator allows linkage-less feedback, via a contact-less magnetic array, from the lever to the end-mounted DVC2000. Integral window mounting of the DVC6200, DVC6000, 3610J and 3620J is also available.
- **Clamped Lever to Reduce Lost Motion** — The clamping of the lever onto a splined valve shaft, coupled with the single pivot linkage, reduces lost motion between the actuator and the valve. The typical cumulative deadband for a Fisher rotary control valve assembly results in 0.5% or less variability.
- **No Bench Set Required** — The new nested spring design requires no bench set. This also simplifies the actuator selection process, see Table 3.
- **ISO 5211 Mounting with Optional Insert** — The actuator can now be mounted directly onto non-spline shafts, such as Square and Double D. This allows the actuator, with its enhanced control, to mount on a wider range of valves conforming to ISO 5211.

Figure 1. NPS 3 V150 with Fisher 2052 Actuator and FIELDVUE™ DVC6200 Digital Valve Controller



W9418-3


- **Adjustable Travel Stops Standard** — Provides the ability to adjust or change the travel range by 30 degrees in either direction without removing the actuator or the addition of extra parts.
- **Fail-safe Mechanism Contains No Aluminum** — All parts in the fail-safe mechanism (made of steel, cast iron and ductile iron) ensure the actuator will maintain safety integrity in the event of a fire.
- **Powder Paint as Standard** — The Emerson powder paint finish offers an excellent corrosion-resistant finish to all external steel and cast iron parts.
- **NAMUR VDE/VDI 3845 Bolt Pattern for Accessory Mounting** — Meeting the global standard ensures compatibility for most accessories, enabling quick and easy mounting.
- **Field Reversible, Right- or Left-Hand Mounting** — The actuator/valve assembly action can be converted from push-down-to-open to push-down-to-close or vice-versa, without additional parts.
- **Declutchable and Top-mounted Handwheels** — Available for all sizes.

## 2052 Actuator Specifications and Materials of Construction

**Table 1. Fisher 2052 Actuator Specifications**

Specifications	
Actuator Mounting Connections	Splined shaft connection, ISO 5211 actuator-to-bracket connection Size 1: F07, Size 2: F10, Size 3: F14
Actuator Sizes	See Table 3
Operating Pressure <sup>(1)</sup>	See Table 5
Maximum Diaphragm Casing Pressure	Sizes 1, 2 and 3 Actuators: 5 barg / 73 psig
Pressure Connection	See Table 4
Torque Output	See Table 5
Actuator Temperature Capabilities <sup>(1)</sup>	Standard: -45 to 80°C / -50 to 176°F Optional: -45 to 100°C / -50 to 212°F <sup>(3)</sup> or -60 to 80°C / -76 to 176°F <sup>(4)</sup>
Operation	Field reversible between PDTC and PDTO; right- and left-hand mounting, any angle of orientation
Approximate Weight	Size 1: 22.2 kg / 49 lb Size 2: 54.4 kg / 120 lb Size 3: 113 kg / 250 lb
Controller/Positioners Available	DVC2000, DVC6020, DVC6030, DVC6200, 3610J, 3620J, 4190, C1
Adjustable Travel Stops	Standard adjustable up and down stops capable of 30 degrees of adjustment per stop.
Accessories Available	846, 646, 2625 and 67C Series, switches, i2P-100, VBL, DXP, GO Switch™
Handwheel	Top-mounted handwheel: Optional on Sizes 1, 2 and 3 actuators Declutchable handwheel <sup>(2)</sup> : Optional on Sizes 1, 2 and 3 actuators
Operational Lockout <sup>(2)</sup>	Available for customer-supplied padlock to lock the actuator in the spring-fail position
<p>1. The pressure/temperature limits in this bulletin should not be exceeded. The current SIL certification for the 2052 actuator is only relevant for the standard temperature ratings shown.</p> <p>2. Lockout and declutchable handwheel cannot be used together on sizes 2 and 3 actuators.</p> <p>3. Temperature range only applies when using silicone diaphragm material. Silicone diaphragm is not available with the top-mounted handwheel option.</p> <p>4. Temperature range requires use of stainless steel bolting for yoke and travel stops. Not available with top-mounted handwheel.</p>	

**Figure 2. Fisher 2052 Assembly**

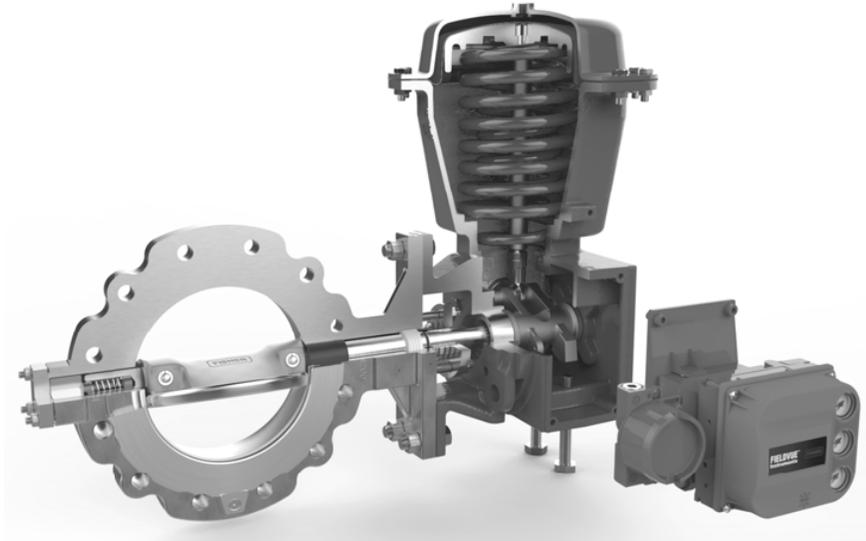

**Table 2. Materials of Construction**

<b>Component</b>	<b>Material</b>
Top casing	Steel
Housing	Cast iron
Diaphragm	Nitrile and nylon standard, Silicone on polyester
Lever	Ductile iron, Stainless steel
Diaphragm plate	Cast iron
<b>OPTIONAL TOP-MOUNTED HANDWHEEL ASSEMBLY</b>	
<b>Component</b>	<b>Material</b>
Handwheel	Cast iron
Handwheel stem	Aluminum-Bronze
Top casing assembly	Steel
O-ring	Nitrile
Pusher plate	Steel

**Figure 3. Top-Mounted Handwheel**



W9484

## Options

**Top-Mounted Handwheel** — For infrequent use as a manual actuator (see Figure 3). For repeated or daily manual operation, the unit should be equipped with a declutchable handwheel actuator.

**Declutchable Handwheel Actuator** — An end-mounted manual actuator can be used to provide on-site control and to provide override capabilities. See Fisher 1078 Declutchable Manual Actuator bulletin (D101339X012) for handwheel actuator specifications. The declutchable handwheel is not compatible with the lockout option on the sizes 2 and 3 actuators and stainless steel lever.

**Limit Switches** — Micro-Switch or NAMCO switches for one or two single-pole, double-throw contacts or GO Switch proximity switches for one or two single-pole, double-throw contacts are available. See separate bulletins for limit switch information.

**Position Indicating Switch** — TopWorx™ DXP M21GNEB switch for one through six single pole, double throw switch contacts are available. See separate bulletin for position indicating switch information.

**Positioner** — For precise positioning of the valve control element, the actuator should be equipped with a positioner. For additional information, contact your [Emerson sales office](#) with complete service conditions.

**Optional Lockout Option** — An actuator locking mechanism is available, which can be used to keep the actuator in a locked position (the same as the spring-fail position) during maintenance. The padlock is customer supplied. The lockout option on the sizes 2 and 3 actuators is not compatible with the declutchable handwheel and stainless steel lever.

**Low Ambient Temperature** — For services with ambient temperatures down to -60°C / -76°F. This construction is suitable for cold climate regions per GOST 15150. Contact your [Emerson sales office](#) for details. Note the current SIL certification for the 2052 actuator is only relevant for the standard temperature ratings shown in Table 1. Not available with the top-mounted handwheel option.

**Tandem Linkage** — Fisher three-way valve assemblies for converging and diverging throttling or on/off service. Valves are operated by a single actuator through a tandem linkage, typically arranged so that one of the valves is opening while the other is closing. Consult your [Emerson sales office](#) for additional details on sizing, selection and installation.

**Optional Stainless Steel Lever** — Available for use in highly corrosive environments, standard ductile iron levers required for use with 1078 Declutchable Manual Operator, lockout and ISO 5211 square insert.

**Table 3. Actuator, Shaft and Lever Size Availability**

SHAFT SIZE		DUCTILE IRON LEVER			STAINLESS STEEL LEVER		
		Actuator Size					
mm	in.	1	2	3	1	2	3
12.7	1/2	X <sup>1</sup>	---	---	X	---	---
14.3 x 15.9	9/16 x 5/8	X <sup>1</sup>	X <sup>1</sup>	---	X	X	---
15.9	5/8	X <sup>1</sup>	X <sup>1</sup>	---	X	X	---
19.1	3/4	X <sup>1</sup>	X <sup>1</sup>	X <sup>1</sup>	X	X	---
22.2	7/8	---	X <sup>1</sup>	X <sup>1</sup>	---	X	X
25.4	1	---	X <sup>1</sup>	X <sup>1</sup>	---	X	X
28.6 x 31.8	1-1/8 x 1-1/4	---	X <sup>1</sup>	X <sup>1</sup>	---	X	X
31.8	1-1/4	---	X <sup>1</sup>	X <sup>1</sup>	---	X	X
31.8 x 38.1	1-1/4 x 1-1/2	---	---	X <sup>1</sup>	---	---	X
38.1	1-1/2	---	---	X <sup>1</sup>	---	---	X
39.7 x 44.5	1-9/16 x 1-3/4	---	---	X <sup>1</sup>	---	---	X
44.5	1-3/4	---	---	X <sup>1</sup>	---	---	X
50.8	2	---	---	X <sup>1</sup>	---	---	X

Note: Ductile iron lever has quad square feature.

**Table 4. Pressure Connections**

ACTUATOR SIZE	PRESSURE CONNECTION			
	1/4 NPT	1/2 NPT	3/4 NPT	G 1/4
1	Standard	Optional	Not Available	Optional
2	Standard	Optional	Not Available	Optional
3	Not Available	Standard	Optional	Not Available

**Table 5. Torque versus Actuator Size**

ACTUATOR SIZE AND ACTION	OPERATING PRESSURE							
	2 barg / 29 psig <sup>(1)</sup>		3 barg / 44 psig <sup>(1)</sup>		4 barg / 58 psig <sup>(1)</sup>		4.7 barg / 68 psig <sup>(1)</sup>	
	Torque							
	N•m	lbf•in	N•m	lbf•in	N•m	lbf•in	N•m	lbf•in
1 (PDTO)	25.5	226	25.5	226	51.2	453	51.2	453
1 (PDTC)	25.5	226	36.2	320	51.2	453	72.4	641
2 (PDTO)	105	930	105	930	210	1860	210	1860
2 (PDTC)	105	930	175	1550	210	1860	320	2840
3 (PDTO)	327	2890	327	2890	631	5580	631	5580
3 (PDTC)	280	2480	557	4930	584	5170	930	8230

1. Do not interpolate between operating pressures. Consult your Emerson sales office for assistance.

**Table 6. Dimensions**

ACTUATOR SIZE	C		E		F		H		P		Y	
	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
1	245	9.65	267	10.51	29	1.14	103	4.06	107	4.21	71	2.80
2	350	13.78	424	16.69	49	1.93	187	7.36	170	6.69	84.5	3.33
3	496	19.53	592	23.31	64	2.52	254	10.0	185	7.28	92	3.62

**Table 7. Actuator / Valve Body Mounting Dimensions**

VALVE SHAFT DIAMETER		FIGURE 7 REFERENCE	T		U		W		
mm	in.		mm	in.	mm	in.	mm	in.	
<b>Style F Mounting: Control-Disk, Vee-Ball™, 8532, 8510B, 8560 and 8580 Eccentric Disk Valves</b>									
12.7 to 15.9	1/2 to 5/8	A	117	4.62	---	---	14.2	0.56	
19.1 to 25.4	3/4 to 1	B	152	6.00	32	1.25	14.2	0.56	
31.8 to 38.1	1-1/4 to 1-1/2	B	235	9.25	46	1.81	17.5	0.69	
44.5 to 50.8	1-3/4 to 2	B	273	10.75	51	2.00	20.6	0.81	
<b>Style G Mounting: 9500 Series Valves</b>									
12.7	1/2	A	117	4.62	---	---	11.0	0.44	
15.9 to 25.4	5/8 to 1	B	146	5.75	32	1.25	11.0	0.44	
31.8 to 38.1	1-1/4 to 1-1/2	B	210	8.25	51	2.00	17.5	0.69	

**Table 8. Actuator / Valve Body Mounting Dimensions**

VALVE SHAFT DIAMETER		V					
		Size 1		Size 2		Size 3	
mm	in.	mm	in.	mm	in.	mm	in.
12.7	1/2	135	5.3	---	---	---	---
15.9	5/8	135	5.3	148.5	5.8	---	---
19.1	3/4	158	6.2	171.5	6.8	179	7.0
25.4	1	---	---	171.5	6.8	179	7.0
31.8	1-1/4	---	---	169.5	6.7	177	7.0
38.1	1-1/2	---	---	---	---	177	7.0
44.5	1-3/4	---	---	---	---	316	12.4
50.8	2	---	---	---	---	316	12.4

**Table 9. Actuator / Valve Body Mounting Dimensions**

ACTUATOR SIZE	Hc		Jc		R
	mm	in.	mm	in.	NPT Connection Used
1	207	8.1	171	6.7	1/4 NPT
2	289	11.4	305	12.0	1/4 NPT
3	398	15.67	356	14.0	1/2 NPT

**Table 10. NAMUR Instrument Mounting Dimensions**

ACTUATOR SIZE	J	K	L	N
	mm			
1	80	30	30.4	35
2	130	30	48.34	55
3	130	30	65	75

**Table 11. ISO 5211 Mounting Information<sup>(1)</sup>**

ACTUATOR SIZE	F SIZE	A	B	AA	BB
		mm			
1	F07	70	M8	16.5	See Table 12
2	F10	102	M10	29.0	
3	F14	140	M16	49.0	


1. Ductile iron levers only

**Table 12. ISO 5211 Square Insert Sizes Available<sup>(1)</sup>**

SQUARE SIZE	ACTUATOR SIZE		
	1	2	3
9	X	---	---
11	X	X	---
14	X	X	X
19	---	X	X
22	---	X	X
27	---	---	X
36	---	---	X


1. Ductile iron levers only

Figure 4. Dimensions (also see Tables 6, 7 and 8)

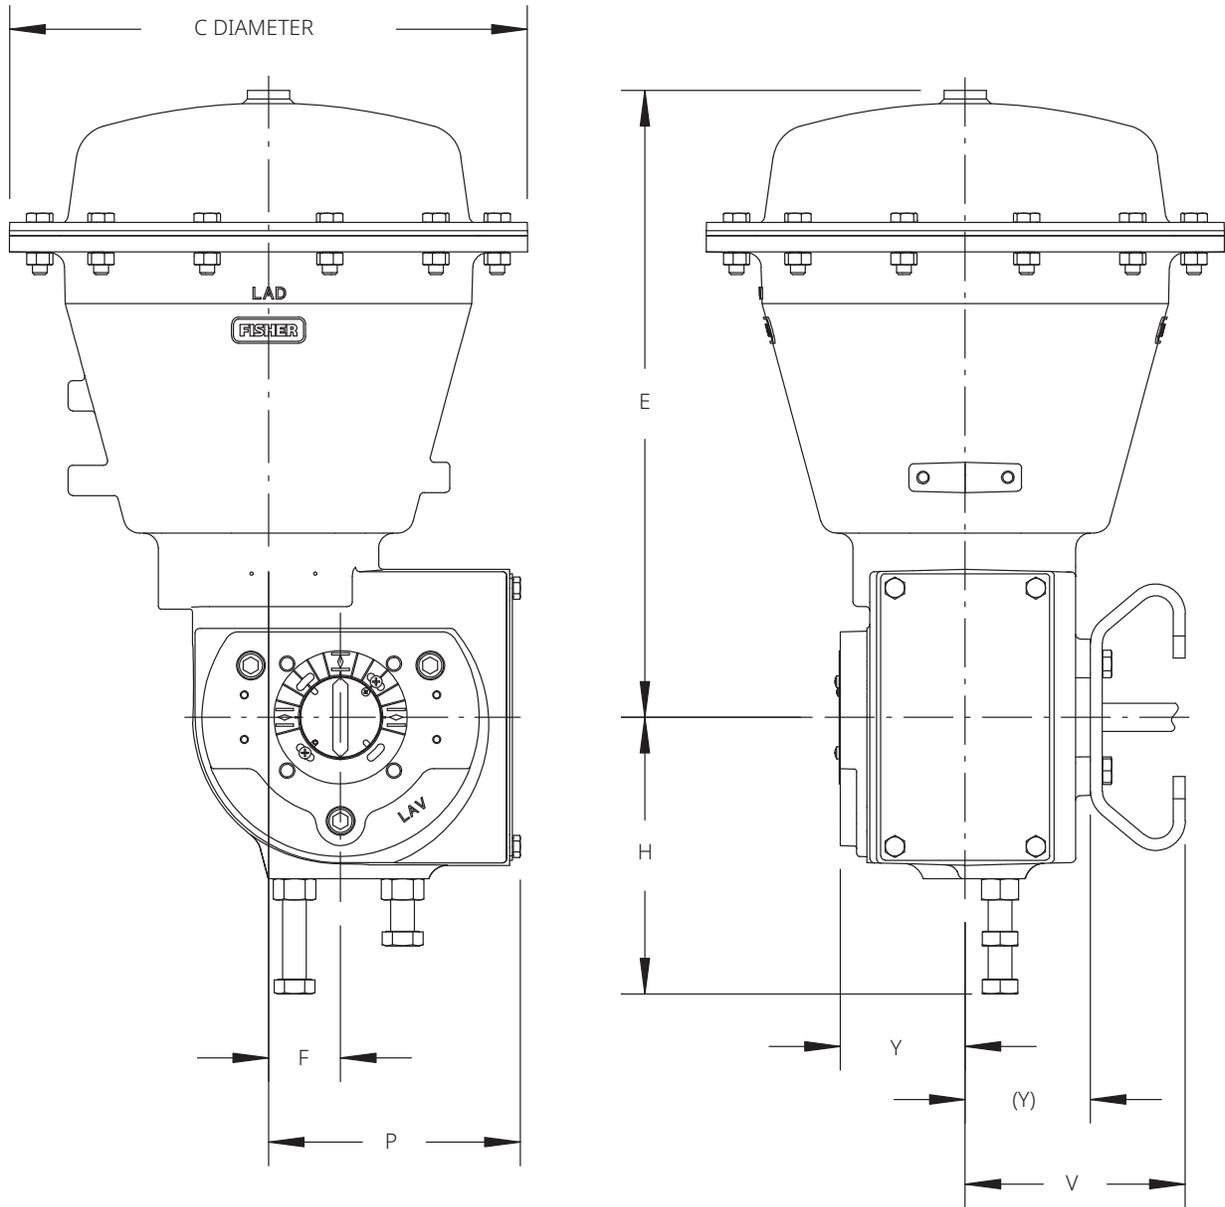


GG00138-A

Figure 5. Handwheel Dimensions (also see Tables 6 and 9)

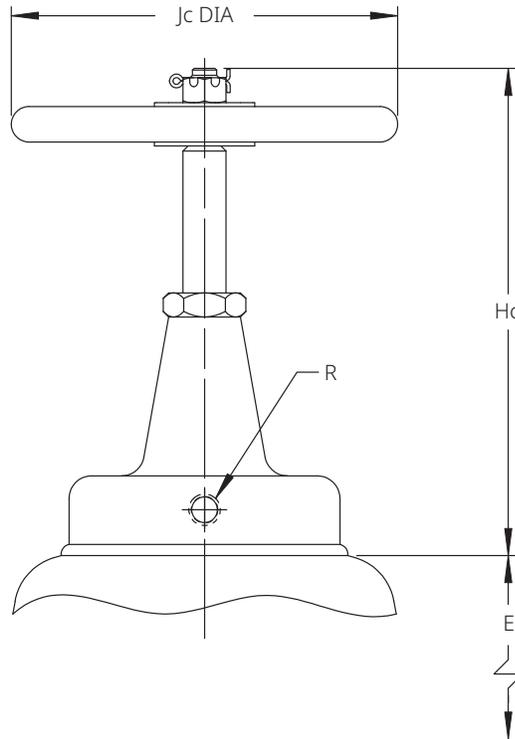


GE38370\_1

Figure 6. Mounting Yokes Dimensions (also see Table 7)

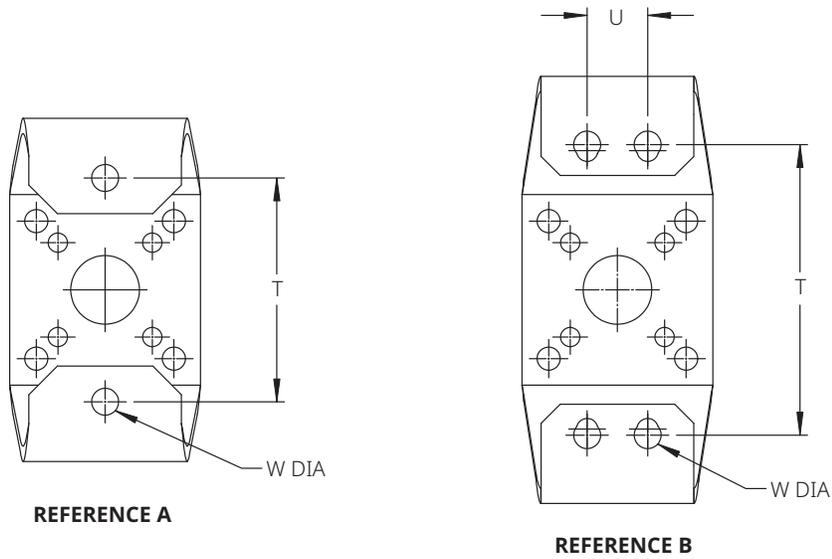

GE38375\_1


Figure 7. NAMUR Instrument Mounting Dimensions (also see Tables 10 and 11)

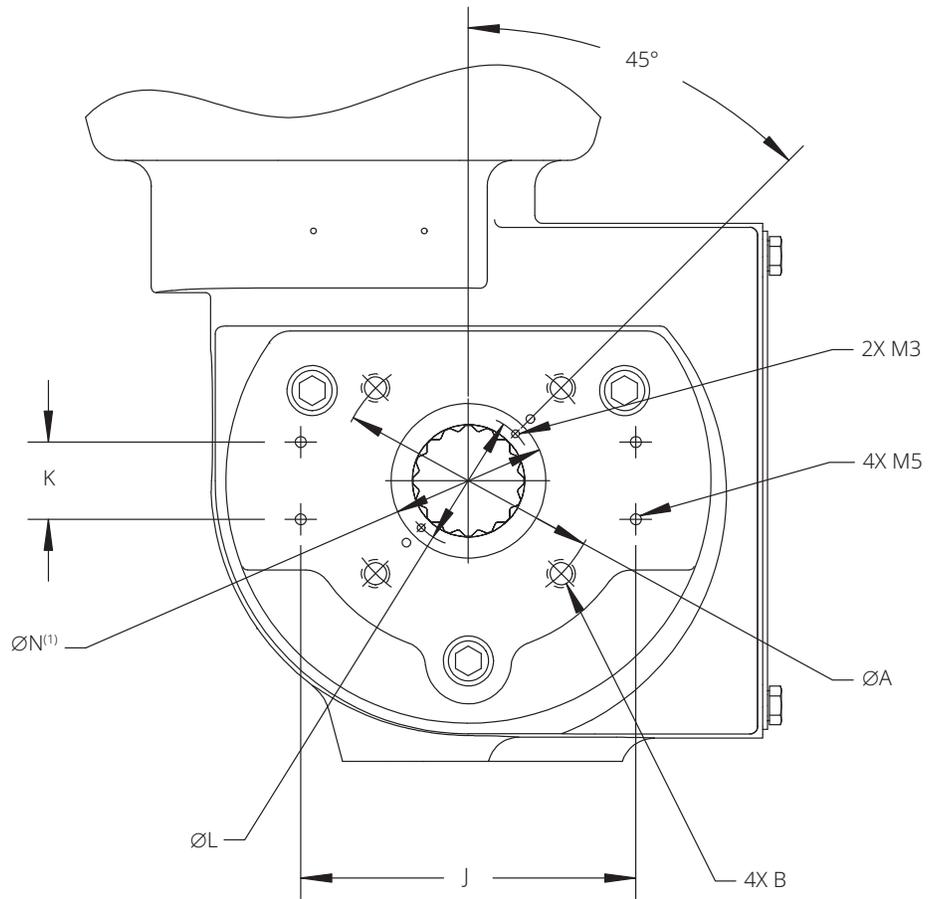

GG06029\_B


1. N IS THE OUTSIDE DIAMETER OF THE LEVER HUB.

**Figure 8. ISO 5211 Square Lever Insert Dimensions (also see Table 11)<sup>(1)</sup>**

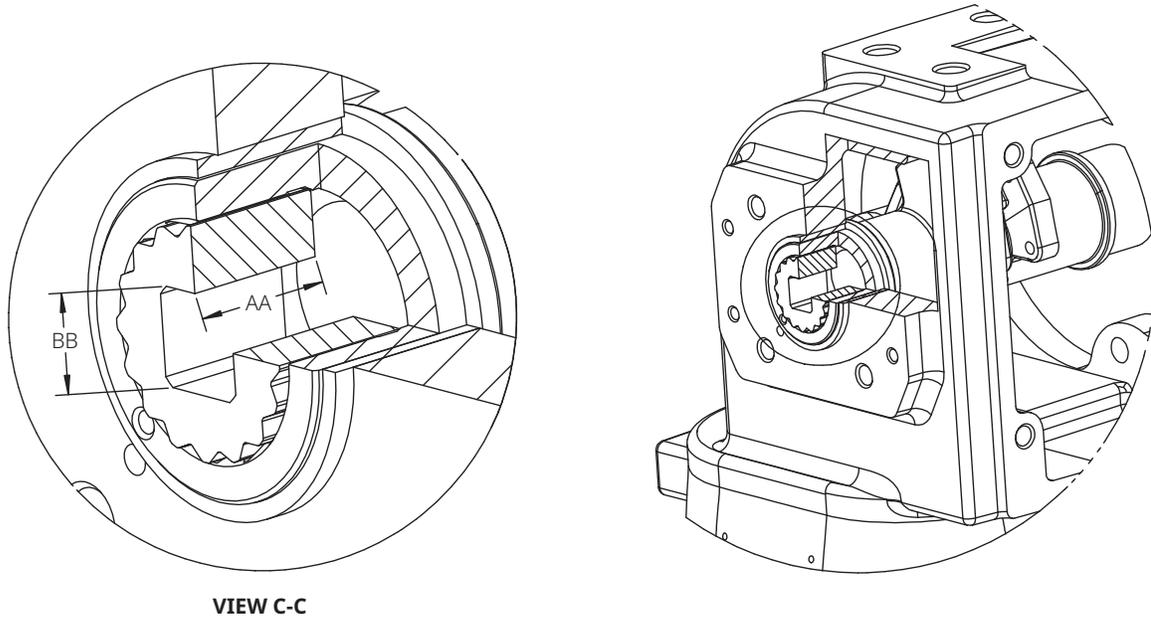

1. DUCTILE IRON LEVERS ONLY.

Figure 9. Fisher 2052 Actuator Mounting Styles (also see Table 13)

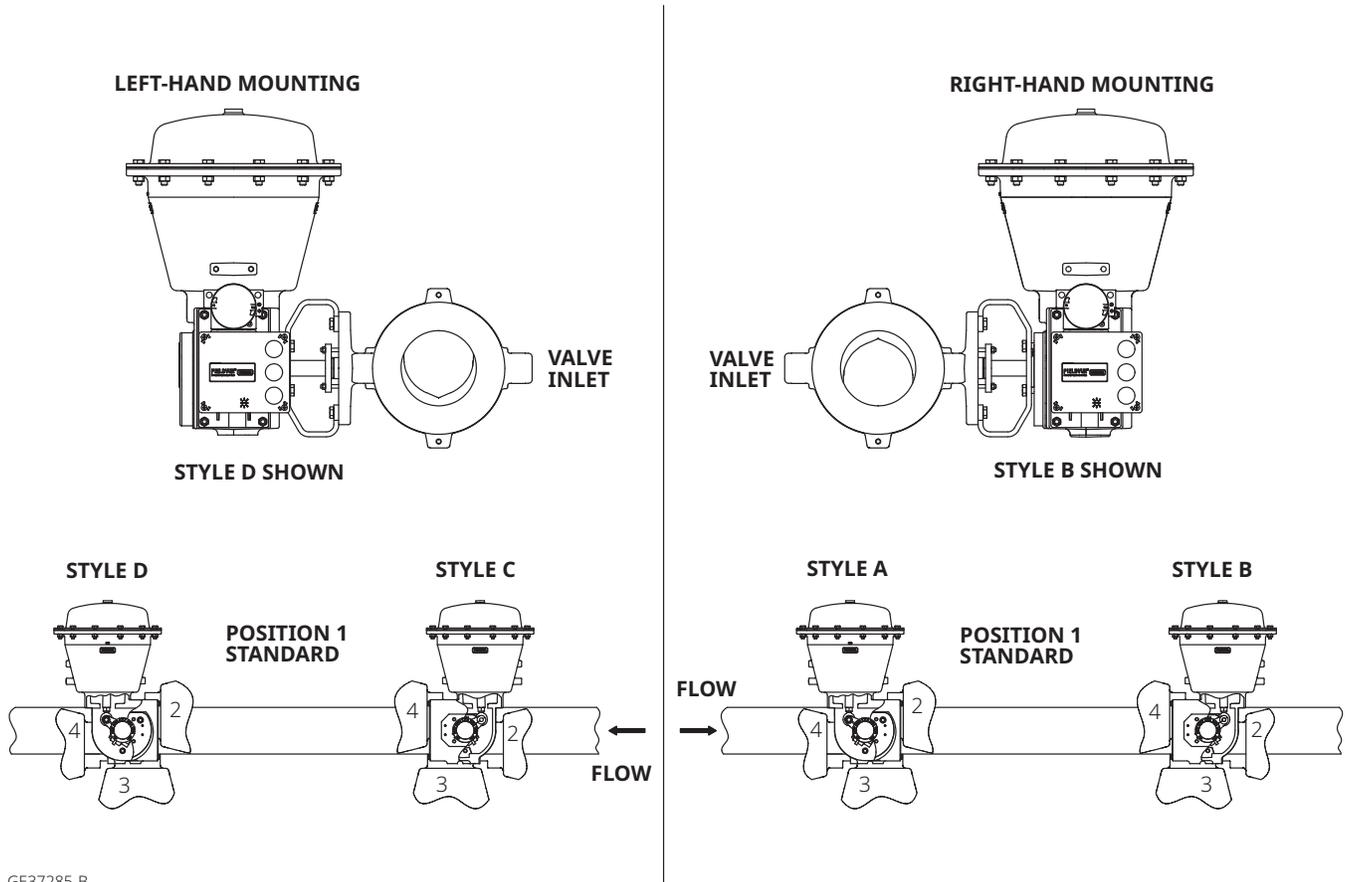

GE37285-B

Table 13. Fisher 2052 Actuator Mounting Styles

MOUNTING (SEE FIGURE 9)	ACTION <sup>(1)</sup>	VALVE						
		Ball/Plug Rotation to Close	V150, V200, V300 Series	CV500 and V500	V250	Ball/Plug Rotation to Close	V250	8510, 8510B, 8532, 8560, 8580, 9500, Control-Disk
RIGHT-HAND	PDTC	CCW	A	A	A	CW	N/A	B
	PDTO	CCW	B	B	B	CW	N/A	A
LEFT-HAND	PDTC	CCW	D	D	N/A	CW	C	C
	PDTO	CCW	C	C	N/A	CW	D	D
LEFT-HAND (Optional)	PDTC	CW	C	N/A	N/A	N/A	N/A	N/A
	PDTO	CW	D	N/A	N/A	N/A	N/A	N/A

1. PDTC = Push Down To Close. PDTO = Push Down To Open.



 [LinkedIn.com/groups/3941826](https://www.linkedin.com/groups/3941826)  
 [Fisher.com](https://www.fisher.com)

 [Facebook.com/FisherValves](https://www.facebook.com/FisherValves)  
 [X.com/FisherValves](https://www.x.com/FisherValves)

D103295X012 © 2008, 2025 Emerson. All rights reserved. The Emerson logo is a trademark and service mark of Emerson Electric Co. Fisher, Control-Disk, FIELDVUE, GO Switch, TopWorx, and Vee-Ball are marks of an entity in the Emerson family of businesses. All other marks are the property of their respective owners.

Neither Emerson nor any of its affiliated entities assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson  
Marshalltown, Iowa 50158 USA  
Sorocaba, 18087 Brazil  
Cernay, 68700 France  
Dubai, United Arab Emirates  
Singapore 128461 Singapore

[www.fisher.com](https://www.fisher.com)

**FISHER™**

  
**EMERSON™**